


The Best Just Got Better.

General Cable introduces the next generation of POLYRAD® XT-125 Marine Cable – MOR™ POLYRAD® XT-125 Marine Cable – the mud oil resistant cable that you can count on for meeting the tough demands of today’s ester-based mud oil drilling for increased safety and improved productivity.



Advancements in mud oil materials offer improved drilling performance while reducing toxicity and environmental impact. New ester-based mud oils are the product of choice among extraction companies for enhanced worker safety, faster drilling, reduced waste and increased production rates. These advanced mud oils significantly raise required performance levels and reliability of marine power cable, and once again, General Cable has risen to the challenge.




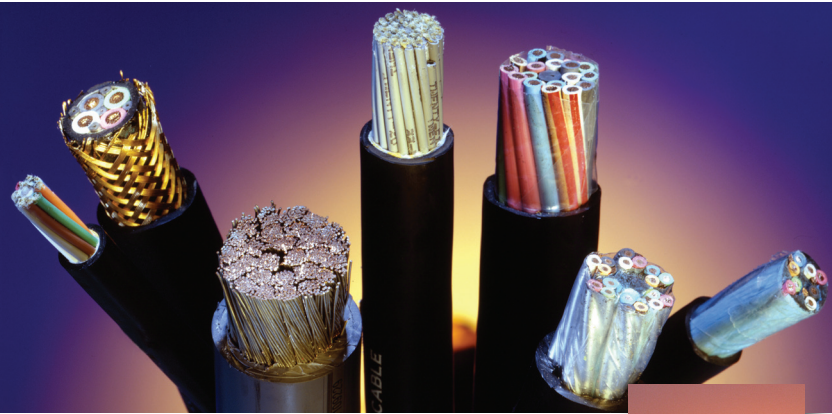


At General Cable, we believe all our customers should have access to the very best in wire and cable products. Regardless of the environment or the requirement, only the most innovative products that promise unmatched reliability, performance and cost effectiveness are good enough for our customers. That’s why we re-engineered our POLYRAD® XT cables to meet the latest conditions of the gas and oil drilling marketplace. That’s why the best just got better.

As the leader in material science and cabling technology, General Cable’s dedicated team of professional chemists, engineers and technicians came together to further enhance our quality line of marine power cables. MOR™ POLYRAD® XT-125 is proven optimized for enhanced mud oil resistance, while continuing to meet the rigorous requirements of IEEE 45 Type P with maximum flame retardance, resistance to environmental conditions, and excellent mechanical properties. *Because our customers deserve only the best.*

Preliminary Mud Oil Immersion Testing

The following graphs depict the % change in property values in relationship to the original cable properties.

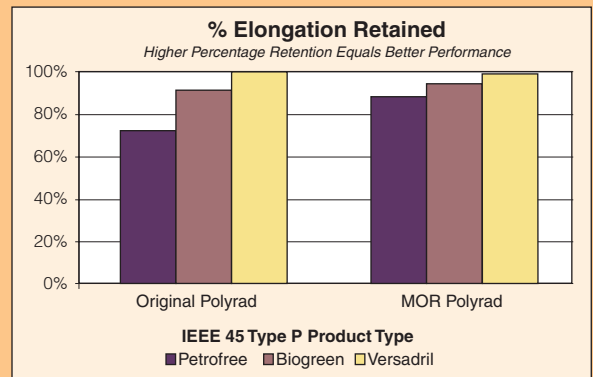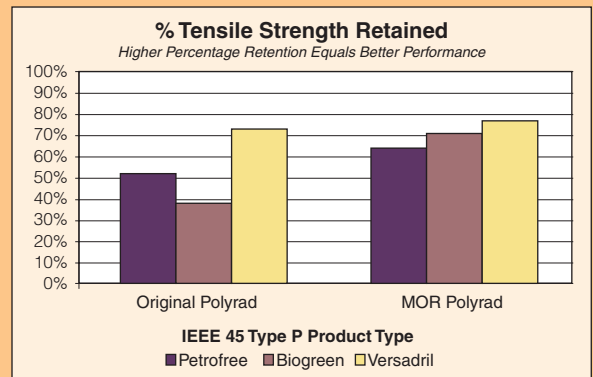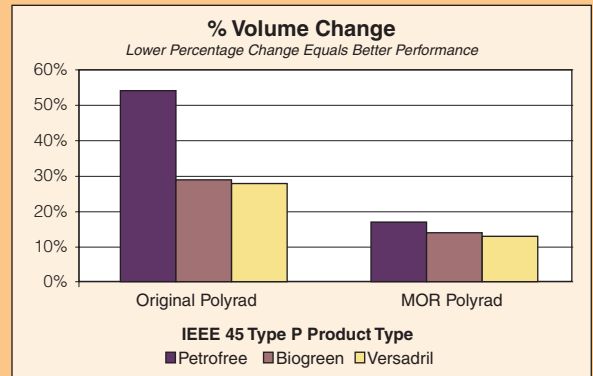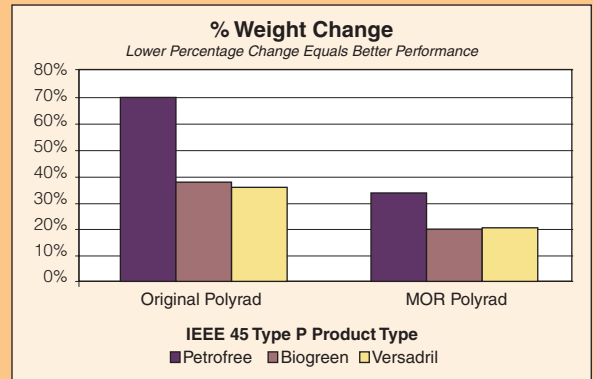

MOR POLYRAD XT-125 Marine Cables have been tested to NEK 606 56-day immersion test protocol for ester-based mud oils. For test results please contact your local sales representative.

MOR™ Polyrad® XT-125 Type P Marine Cables... Servicing the Offshore and Land-Based Drilling Markets

Offering a full line of Mud Oil Resistant MOR™ Polyrad® XT-125 Type P Marine IEEE 45/IEEE 1580 cables — General Cable has played a leading role in the development of irradiated thermoset jackets with maximum flexibility and mud resistance to stand up to severe stresses of installation and operation in hostile environments.

All of General Cable's MOR Polyrad XT-125 Type P Marine product line is engineered in accordance with the following Regulatory and Certification Agencies and manufactured in conformance with written quality control procedures all under our ISO-9001: 2000 commitment to quality in all aspects of the organization:

- American Bureau of Shipping (ABS)
- Canadian Standards Association (CSA)
- Det Norske Veritas (DNV)
- Intertek Test Service (ETL)
- Lloyd's Register of Shipping (LRS)
- Transport Canada Marine Safety (TCMS)
- Underwriters Laboratories Inc. (UL)
- United States Coast Guard (USCG)

General Cable's MOR Polyrad XT-125 Type P Marine product line of enhanced Mud Oil Resistant cables are suitable for the following applications:

- Permitted in Class I Division I and Zone I environments (certain regulatory bodies may require armor & sheath)
- Engineered for hostile environments; marine shipboard, offshore drilling platforms, FPSOs and land-based drilling production.
- For use as branch power feeders, power distribution, control, lighting, alarm, energy management and signaling circuits.

Design Adherence Specifications:

- API-RP14F • CSA C22.2 No.245 FT4 -40°C • CSA C22.2 No.38 TC • ICEA S-95-658 • IEC 60092-3 • IEEE 45 • IEEE 1580 Type P • IEEE 383
- IEEE 1202 • UL 1277 • UL 1309 • UL Listed 110°C Marine Shipboard Cable • VW-1 and IEC 60332-3A Flame Tests • Multi-Conductor Cable with Equipment Grounding Conductor Passes (UL) Exposed Run (ER) and Open Wiring Crush and Impact Tests; May be Suitable for Hazardous Locations

Low-Voltage Unarmored or Armored Power Cable 2000V: 8 AWG thru 1111 kcmil Single Conductor Power

Product Line	Insulation	Optional Armort	Sheath
MOR Polyrad XT-125 Type P Single Conductor Power	Polyrad XT-125 Black Irradiated Cross-Linked Polyolefin* (XLPO)	Bronze Braid 88% Minimum Coverage	Black Irradiated Cross-Linked Hypalon® Chlorosulfonated Polyethylene (CSPE)

*Heavy-Duty for 4/0AWG and larger † Armored constructions

Low-Voltage Shielded Unarmored or Armored & Sheathed Variable Frequency Drive (VFD) Power Cable 600V & 2000V:

1/0 AWG thru 373 kcmil Three Conductor Power

Product Line	Insulation	Grounds	Shield	Inner Jacket*	Optional Armort†	Sheath†
MOR Polyrad XT-125 Type P Three Conductor VFD Power	Polyrad XT-125 Irradiated Cross-Linked Polyolefin (XLPO)	3 Uninsulated Tinned Copper Class I Stranded Ground Wires	Overall Tinned Copper Braid Shield With Aluminum/Polymer Tape 100% Shield Coverage	Black Irradiated Cross-Linked Hypalon® Chlorosulfonated Polyethylene (CSPE)	Bronze Braid 88% Minimum Coverage	Black Irradiated Cross-Linked Hypalon® Chlorosulfonated Polyethylene (CSPE)

*Unarmored & armored constructions † Armored constructions

Low-Voltage Unarmored or Armored & Sheathed Power Cable 600V: 8 AWG thru 777 kcmil Multi-Conductor Power

Product Line	Insulation	Inner Jacket*	Optional Armort	Sheath†
MOR Polyrad XT-125 Type P Multi-Conductor Power	Polyrad XT-125 Irradiated Cross-Linked Polyolefin (XLPO)	Black Irradiated Cross-Linked Hypalon® Chlorosulfonated Polyethylene (CSPE)	Bronze Braid 88% Minimum Coverage	Black Irradiated Cross-Linked Hypalon® Chlorosulfonated Polyethylene (CSPE)

*Unarmored & armored constructions † Armored constructions

Low-Voltage Unarmored or Armored & Sheathed Control Cable 600V: 18 AWG thru 10 AWG Multi-Conductor Control

Product Line	Insulation	Inner Jacket*	Optional Armort	Sheath†
MOR Polyrad XT-125 Type P Multi-Conductor Control	Polyrad XT-125 Irradiated Cross-Linked Polyolefin (XLPO)	Black Irradiated Cross-Linked Hypalon® Chlorosulfonated Polyethylene (CSPE)	Bronze Braid 88% Minimum Coverage	Black Irradiated Cross-Linked Hypalon® Chlorosulfonated Polyethylene (CSPE)

*Unarmored & armored constructions † Armored constructions

Low-Voltage Individual/Overall Shielded Unarmored or Armored & Sheathed Signal Cable 600V: 20 AWG thru 14 AWG Paired/Triad Signal

Product Line	Insulation	Shield	Inner Jacket*	Optional Armort	Sheath†
MOR Polyrad XT-125 Type P Paired Signal	Polyrad XT-125 Irradiated Cross-Linked Polyolefin (XLPO)	Aluminum/Polymer Tape and Tinned Copper Drain Wire over each Pair and Overall	Black Irradiated Cross-Linked Hypalon® Chlorosulfonated Polyethylene (CSPE)	Bronze Braid 88% Minimum Coverage	Black Irradiated Cross-Linked Hypalon® Chlorosulfonated Polyethylene (CSPE)

*Unarmored & armored constructions † Armored constructions

Other General Cable Product Lines for the OGP Market include:

Medium-Voltage UniShield® and Uniblend® cables; Low-Voltage DuraSheath®, CCW®, FREP®, PLTC and ITC cables; full line of IEC/British standard products.

GENERAL CABLE, CCW, DURASHEATH, FREP, MOR, POLYRAD, UNIBLEND, and UNISHIELD are trademarks of General Cable Technologies Corporation. HYPALON is a registered trademark of the Dupont Corporation. PETROFREE is a registered trademark of Baroid Drilling Fluids, a subsidiary of Halliburton. BIOGREEN is a registered trademark of Baker-Hughes Corporation. VERSADRIL is a registered trademark of M-I Drilling Fluids.

© 2005. General Cable Technologies Corporation. Highland Heights, KY 41076
All rights reserved. Printed in USA



4 Tesseneer Drive
Highland Heights, Kentucky 41076
Phone: (888) 593-3355 Fax: (859) 572-8463
www.generalcable.com

Form No. INS-0405-R0305